

TWIN SPLIT

TST.P | TST.E

SOLLEVATORE MOBILE A DOPPIA PEDANA INDIPENDENTE AD AZIONAMENTO ELETTRO-IDRAULICO O PNEUMO-IDRAULICO
MOBILE DOUBLE FRAME LIFT WITH ELECTRO-HYDRAULIC PUMP OR HYDRO-PNEUMATIC PUMP

Sollevatore mobile a doppia pedana indipendente ad azionamento elettro-idraulico o pneumo-idraulico.

Dotato di sicurezza automatica a rilascio remoto.

Due pedane separate che possono essere inserite facilmente sotto la vettura.

Mobile double frame lift with electro-hydraulic pump or hydro-pneumatic pump.

The lift has two independent frames that slide under each side of the vehicle.

Automatic safety locks with remote release.




TST.P

Twin Split
con pompa

Twin Split
with pump

**TST.E**

Twin Split
con centralina
Twin Split
with power unit

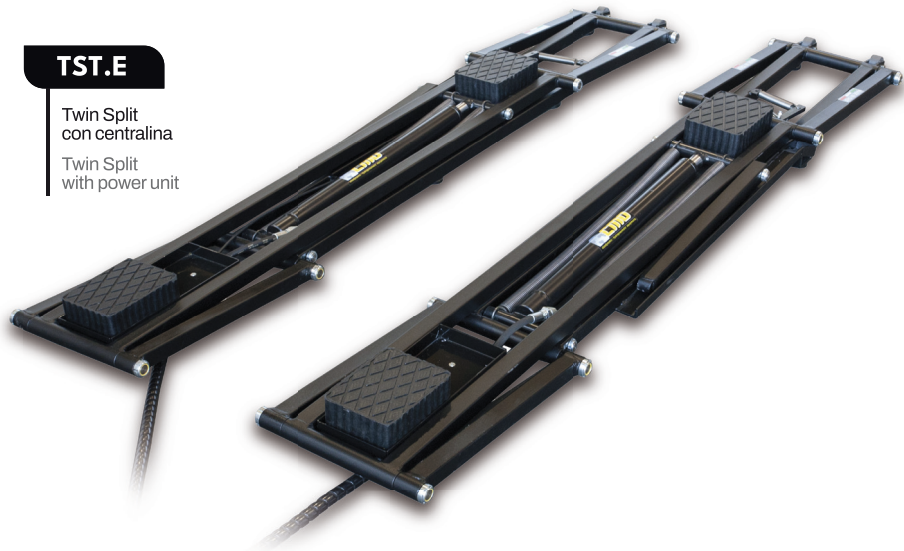

Applicazioni | Applications



Caratteristiche tecniche | Technical features

	PESO / WEIGHT	95 kg		PORTATA / CAPACITY	2500 kg
	LUNGHEZZA / LENGHT	1800 mm		POMPA / PUMP	350 bar
	ALT. MAX / MAX HEIGHT	455 mm		TAMPONE / BUFFER	60 mm
	ALT. MIN / MIN HEIGHT	85 mm		IMBALLO / PACKAGING	2000x320x650 mm